




📖 REMOTE INSTRUCTION MANUAL V2.0 01/07/2026 📖


Read all steps before use.

Step 1: What is in the Box

1x God-Bell Remote	1x Remote Pouch.	1x USB-C charging cable.	1x USB power adapter.
			



Step 2: Know Your Remote

The Front: Buttons and Display

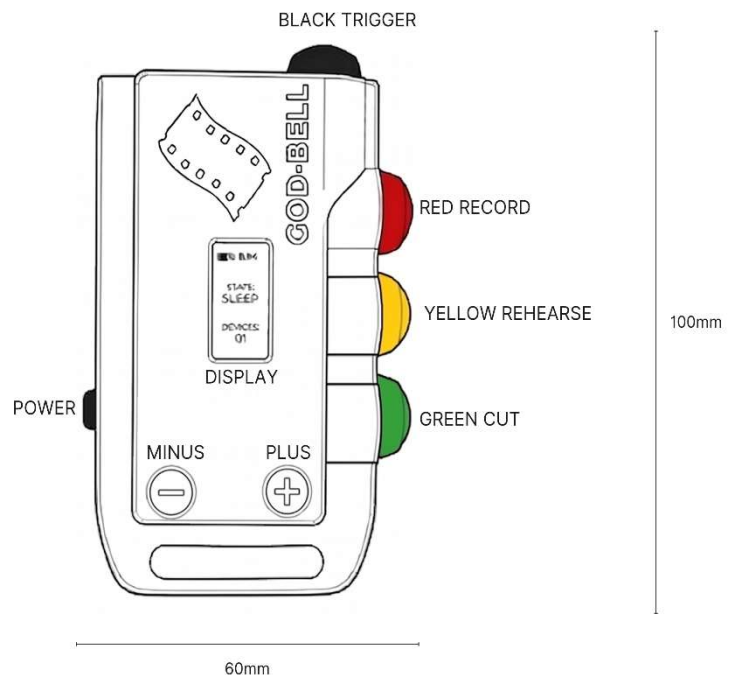

The Top: USB-C port - For charging.

The Side: Power switch - ON/OFF (side).

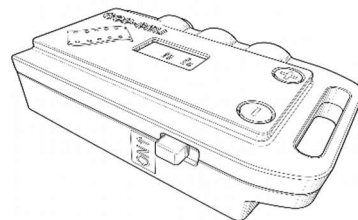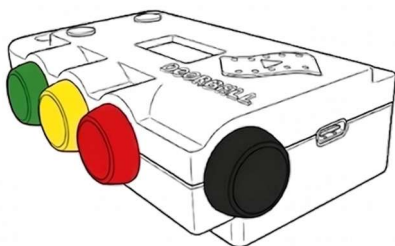

Step 3: Turn On


How to turn the remote on and off.

- Find power switch on left side.
- Slide switch UP for ON.
- Screen shows spinning God-Bell logo.
- Slide switch DOWN for OFF.
- **Step 4: Charging**

Step 5: Using Basic Buttons

- How to give your remote power.
- Find the USB-C port on top of remote.
- Plug USB-C cable into remote.
- Plug other end into power adapter.
- Wait 1 hour for full charge.
- Battery lasts 2-3 days.


- GREEN = CUT.
 - Hold BLACK TRIGGER for 1 second.
 - Keep holding trigger.
 - Press GREEN button at same time.
- RED = RECORDING.
 - Hold BLACK TRIGGER for 1 second.
 - Keep holding trigger.
 - Press RED button at same time.
- YELLOW = REHEARSING.
 - Hold BLACK TRIGGER for 1 second.
 - Keep holding trigger.
 - Press YELLOW button at same time.

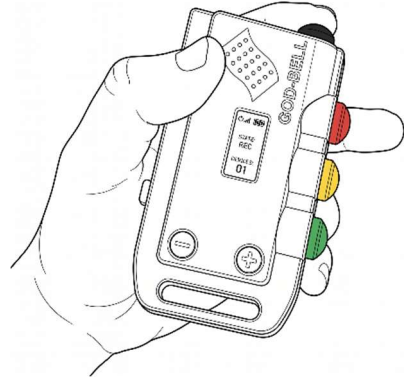

Step 6: Opening the Advanced Menu

How to access advanced features like Sleep, Lunch, and Wrap.

- Use TRIGGER + PLUS + MINUS together to open menu.
- Hold BLACK TRIGGER for 1 second.
- Press PLUS and MINUS at same time.
- Screen shows arrows ← →.
- Press PLUS or MINUS to move through options.
- Press YELLOW to select your option.

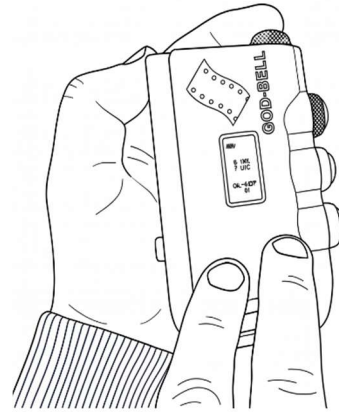

Step 7: Sleep Mode


How to turn the screens off.

- Press PLUS or MINUS to move menu to SLEEP.
- Press YELLOW to select.
- Remote goes to sleep.
- Sleep will blank all screens.

Step 8: Lunch Timer

Start the lunch countdown.

- Press PLUS or MINUS to move to LUNCH.
- Press YELLOW to select.
- Choose from 2 lunch options.
- Use - or + to change lunch duration.
- Use GREEN to move down and RED to move up.
- Use - or + to change the lunch end time.
- Press YELLOW to start.
- Lunch screen shows the countdown.



Step 9: Wrap

How to signal the end of the day.

- Press PLUS or MINUS to move to WRAP.
- Press YELLOW to select.
- Day is finished.

Step 10: Custom Screens

How to access pre-set custom alerts.

- use - and + to move through the menu option until you see CST1 , 2 and 3.
- Press yellow to trigger.
- Please note Custom screens are setup using the cloud app.